

# TPASS<sup>®</sup> 3 RECHARGEABLE



Shown Actual Size

## TPASS<sup>®</sup> 3 RECHARGEABLE FEATURES



## TPASS<sup>®</sup> 3 RECHARGEABLE SPECIFICATIONS

**DIMENSIONS:** 2-1/8" wide by 4" high (including antenna) by 1-3/4" deep, excluding Grip Clip.

**WEIGHT:** 8 oz with battery (without key).

**ALARM AUDIO OUTPUT:** 92+ dBA measured at 10 ft.

**CASE:** Rugged, high temperature and impact resistant, translucent polycarbonate plastic.

**SOUND DISCERNABILITY:** 6 dBA against background noise.

**BATTERY:** Internal Rechargeable Lithium-Ion.

**BATTERY LIFE:** Up to 90 hours in Sensing Mode and 4 to 6 hours in Alarm Mode.

**METHODS OF ATTACHMENT:** Grip Clip and D-Ring

**WARRANTY:** One year from date of purchase.

**CERTIFICATIONS:** Intrinsically Safe per ANSI/UL913, sixth edition. For use in Class 1, Groups A, B, C and D; and Class II, Groups E, F, G: Division 1 Hazardous Locations.

Operating Temperature Code T6. CSA C22.2 No.157-92. FCC part 15, Industry Canada


**GRACE**  
**INDUSTRIES, INC.**  
Solutions for Life Safety

305 Bend Hill Road  
Fredonia, PA 16124 U.S.A.  
724-962-9231 • Fax: 724-962-3611

**1.800.969.6933** [www.graceindustries.com](http://www.graceindustries.com)

QUALITY SYSTEM  
REGISTERED TO  
ISO 9001-2000

# LTX200 RECHARGEABLE

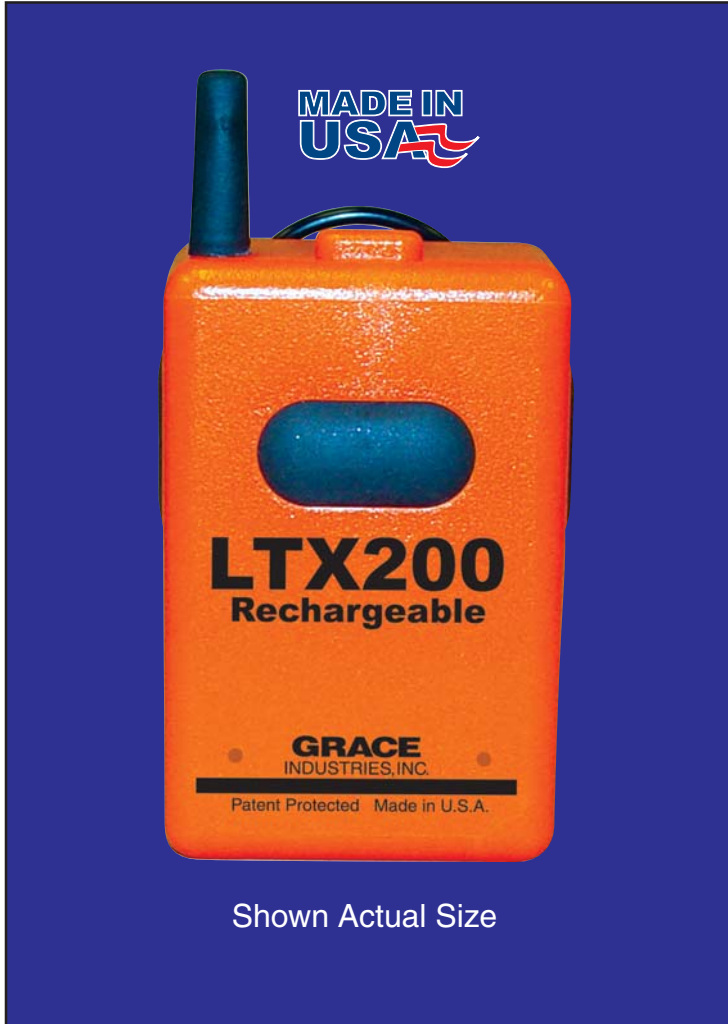

Shown Actual Size

## LTX200 RECHARGEABLE FEATURES



## LTX200 RECHARGEABLE SPECIFICATIONS

**DIMENSIONS:** 2-1/8" wide by 4" high (including antenna) by 1-3/4" deep, excluding Grip Clip.

**WEIGHT:** 8 oz with battery (without key).

**ALARM AUDIO OUTPUT:** 92+ dBA measured at 10 ft.

**CASE:** Rugged, high temperature and impact resistant, translucent polycarbonate plastic.

**SOUND DISCERNABILITY:** 6 dBA against background noise.

**BATTERY:** Internal Rechargeable Lithium-Ion.

**BATTERY LIFE:** Up to 200 hours in Sensing Mode and 4 to 6 hours in Alarm Mode.

**METHODS OF ATTACHMENT:** Grip Clip and D-Ring

**WARRANTY:** One year from date of purchase.

**CERTIFICATIONS:** Intrinsically Safe per ANSI/UL913, sixth edition. For use in Class 1, Groups A, B, C and D; and Class II, Groups E, F, G: Division 1 Hazardous Locations.

Operating Temperature Code T6. CSA C22.2 No.157-92. FCC part 15, Industry Canada

**GRACE**  
**INDUSTRIES, INC.**  
*Solutions for Life Safety*

305 Bend Hill Road  
Fredonia, PA 16124 U.S.A.  
724-962-9231 • Fax: 724-962-3611  
**1.800.969.6933** [www.graceindustries.com](http://www.graceindustries.com)

QUALITY SYSTEM  
REGISTERED TO  
ISO 9001-2000